3" Aluminum Belled Cross

Betts welded construction belled crosses are designed for use on cargo tanks and satisfy a wide variety of piping needs. The belled cross offers multiple advantages over standard fittings. Significant reduction in joint preparation and fit-up time can be realized while the belled end allows for a fillet weld in place of a more difficult butt weld joint. Slight angular piping misalignments can be easily accommodated. 100% leak testing by Betts ensures no weld seam leaks.

Belled Cross fittings are manufactured in accordance with API recommended practice 1004 with a minimum burst pressure of 4 times the MAWP per 49CFR178.345-9(b).
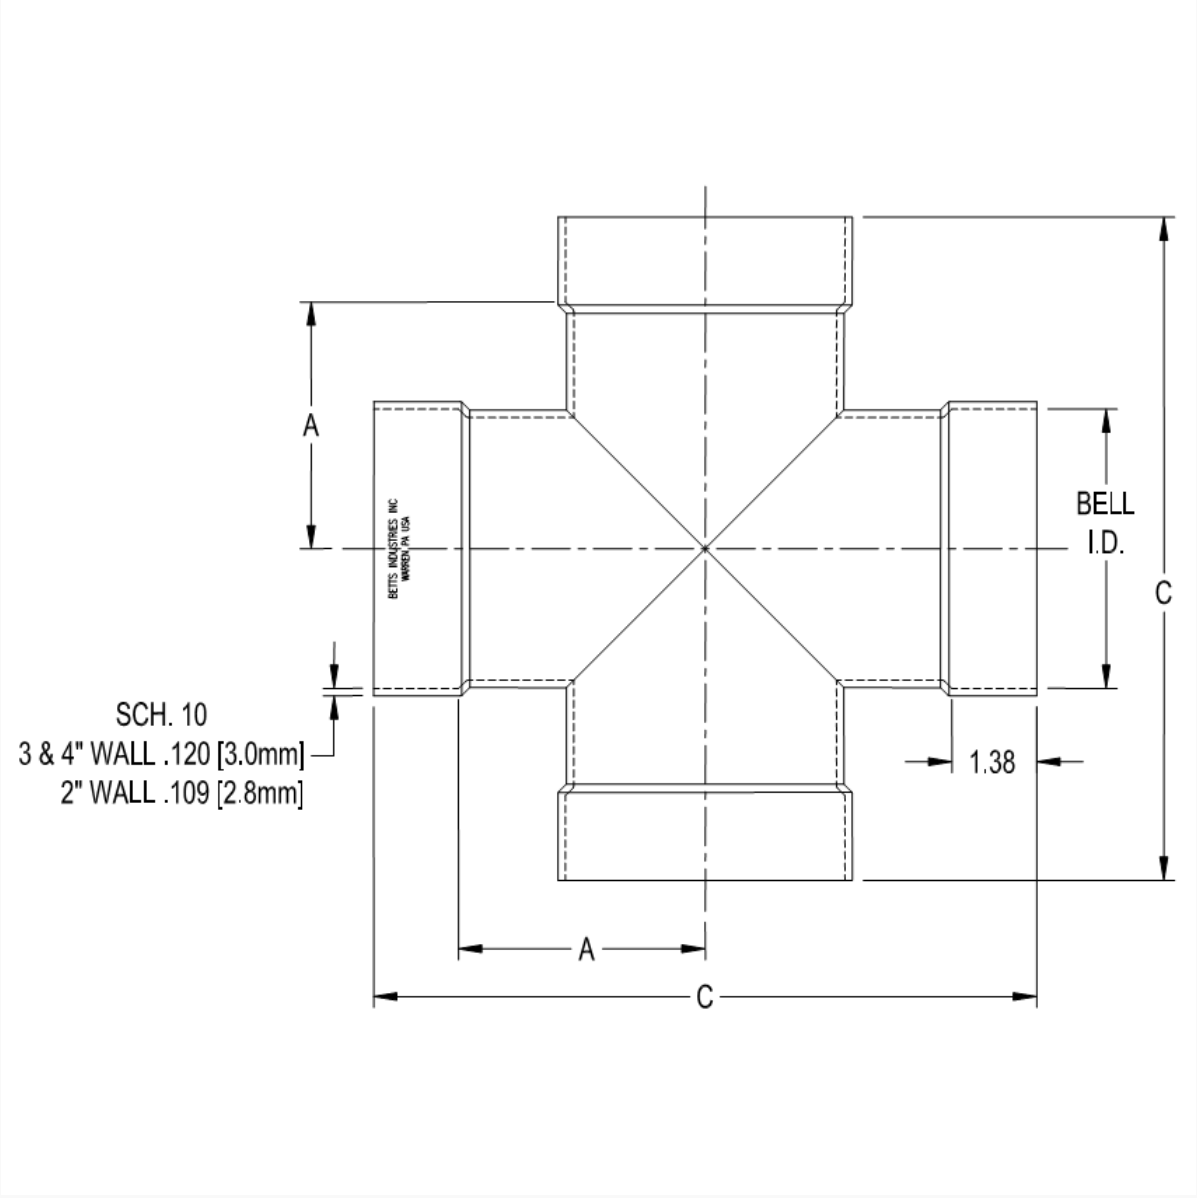
Part No.	Material	Weight lb. [kg]	A in. [mm]	C in. [mm]	Bell I.D. in. [mm]	MAWP lb. [kg]
BC390AL	6063 Alum.	1.71 [.78]	3.00 [76.2]	8.75 [222.3]	3.53 [89.7]	200 [13.8]