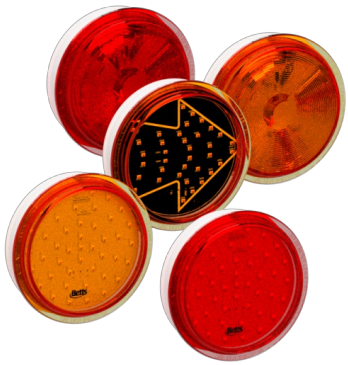

4” Grommet Mount Stop/Turn/Tail Lite Ranger™ LED – 12/24V

The Betts’ 4” grommet offers a simple, care-free installation and is made from EPDM rubber which offers outstanding weathering properties including excellent ozone and sunlight resistance. Grommets are available for both a 4.5- and 4.75-inch diameter mounting hole and is sold separately. The Lite Ranger™ LED Lamp insert is a robust, fully sealed unit made from impact resistant polycarbonate plastic and is available in numerous configurations for any application. The LED insert pushes into the installed grommet and provides a protruding lens design which greatly reduces snow, ice or debris build-up that is a familiar downside of the competition’s recessed style. The 3-position Super-Seal™ socket offers a locking tab and securely mates with the wiring harness plug to create a weatherproof seal. The Betts’ Grommet Mount is an ideal configuration to combine with a Tru-Fit™ Custom Lighting Kit to satisfy any requirement.

- Designed to meet FMVSS 108 requirements (49CFR§571.108)
- SAE DOT Lighting Codes: IP2STR
- Supports System Voltages of 12Vdc and 24Vdc
- Reverse Polarity Protected
- Mounts via EPDM grommet (sold separately)
- Covered by Betts’ 5-Year Limited Warranty

Other options such as 40 series, 45 series and 47 series styles are available.

Assembly Number		Description	Connector Type	Power Tail/Marker	Power Stop/Turn	Current Tail/Marker	Current Stop/Turn
AA4FGA3S		Sequential Arrow – Amber flat lens with no optics, 36 LED's,	SuperSeal™ 3-Position Socket	-	2.7/5.4 W	-	224 mA @ 12V and 24V

Assembly Number		Description	Connector Type	Power Tail/Marker	Power Stop/Turn	Current Tail/Marker	Current Stop/Turn
A4FGM3S		12V/24V Turn/Marker – Amber flat lens with no optics, 44 LED's, 12V/24V	SuperSeal™ 3-Position Socket	.12 W	2.4 W	10 mA @ 12V 5mA @ 24V	200 mA @ 12V 100 mA @ 24V
SR4FG453S		Stop/Turn/Tail – Red flat lens with no optics, 45 LED's, 12V/24V	SuperSeal™ 3-Position Socket	.36 W @ 12V .72 W @ 24V	3.84 W @ 12V 7.20 W @ 24V	30mA @ 12V and 24V	300 mA @ 12V and 24V
SR4XGS3S		Stop/Turn/Tail – Red flat lens with optics, single LED, 12V/24V	SuperSeal™ 3-Position Socket	.10 W	1.5 W	8 mA @ 12V 4mA @ 24V	124 mA @ 12V 62 mA @ 24V
TA4FGM3S		Turn – Amber flat lens with no optics, 44 LED's, 12V/24V	SuperSeal™ 3-Position Socket	-	2.4 W	-	200 mA @ 12V 100 mA @ 24V
TA4XGS3S		Turn – Amber flat lens with optics, single LED, 12V/24V	SuperSeal™ 3-Position Socket	-	2.6 W	-	215 mA @ 12V 108 mA @ 24V
28901EP		4” Round Grommet that fits into a Ø4.50” Mounting Hole					
29140EP		4” Round Grommet that fits into a Ø4.75” Mounting Hole					

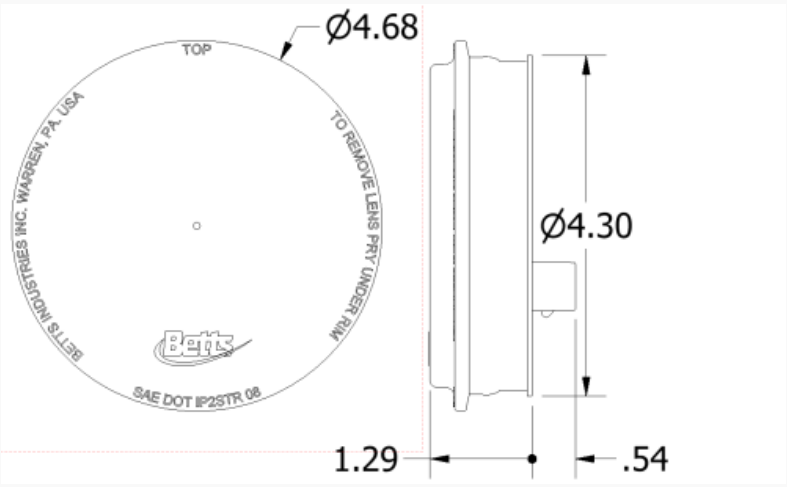

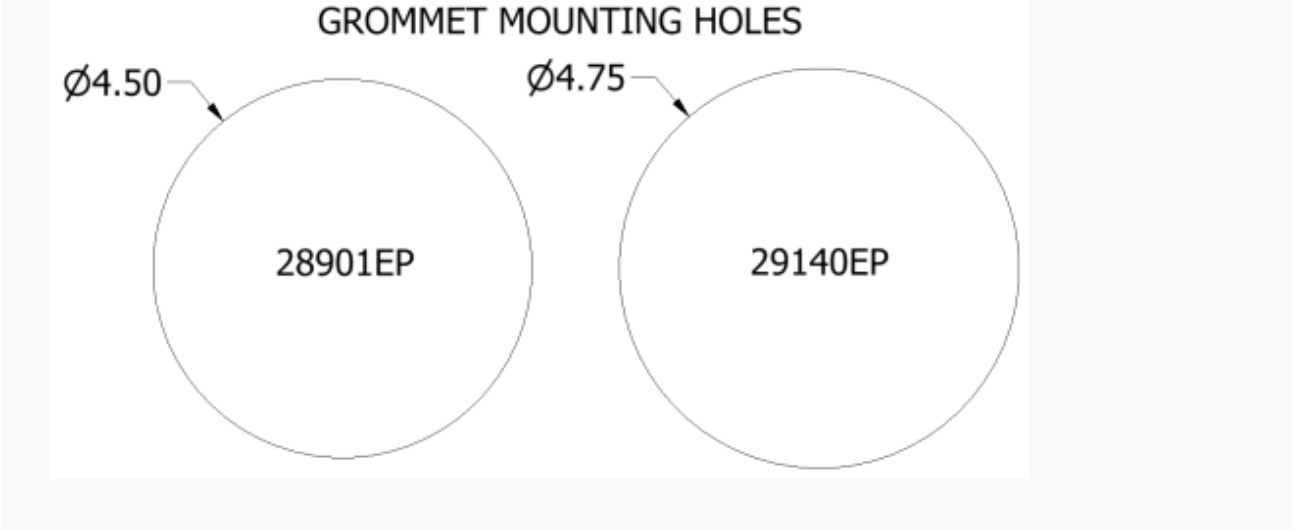
GROMMET MOUNTING HOLES
Ø4.50
28901EP
Ø4.75
29140EP