ASME, 10”, Flange Style for Lined Tanks, 4 Hold Down, 50 psi MAWP, Model 8261, 10” High Collar

- ASME SYMBOL & DATA PROVIDED
- THREADED HOLD-DOWNS
- 6” OR 10” HIGH COLLAR AVAILABLE
- DESIGNED FOR RUBBER LINING

This Tiona 10” Pressure Fill conforms to the requirements of the ASME code for pressure vessels Section VIII, Division 1. Cover and Collar are flanged to provide adequate area for rubber lining.

Assembly No.	Weld Collar	Cover	Wing-Nut, Washer Hinge Pins	Number Hold Downs	* Working Pressure	Weight
8261SCX-10"	Steel	Steel	Stnls 304	4	50 PSI [3.4 BAR]	42 lb
8261LCX-10"	Stnls 316L	Stnls 316L	Stnls 304	4	50 PSI [3.4 BAR]	19.0 kg

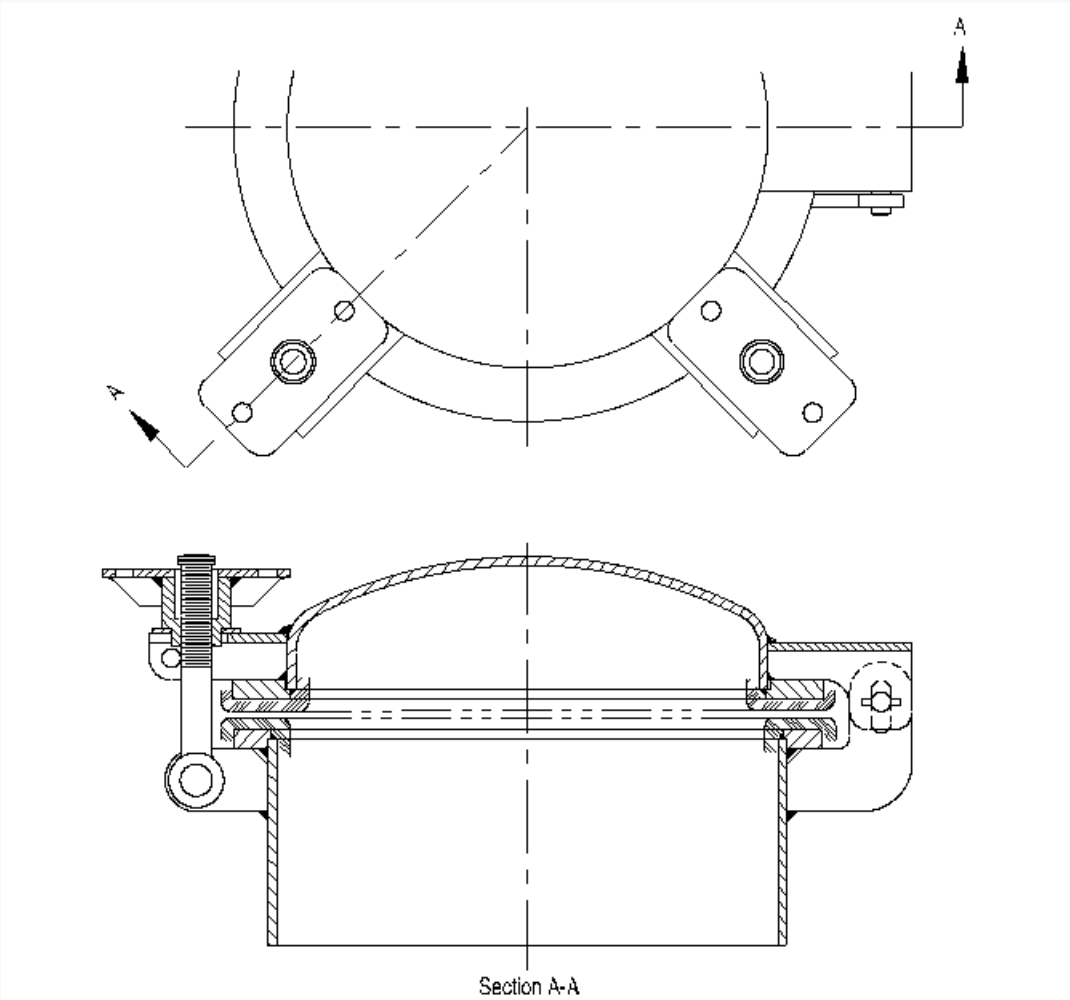

Model 8261

ASME Replacement Swing-bolt / Wing-nut Assemblies

MM-MH001: **Full Opening Manhole Installation and Maintenance Manual**

EB3-99: **Installation and Care Instructions for Teflon Encapsulated Square Gaskets for Tiona-Betts Full Opening Manholes**

EB-07-03: **Maintenance and Use of Betts Full Opening Pressure Manhole**

⚠ **WARNING**: This product can expose you to chemicals including Chromium (hexavalent compounds) which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov. For additional information on Betts products and Proposition 65 list please see: http://www.bettsind.com/prop-65/