

Manual 4" Sliding Valve (Replaceable O-ring Seat) - ANSI Flange x ANSI Flange

The Betts replaceable o-ring sliding valve is a manually operated external stop valve that provides a quick open or close function. The replaceable o-rings provide a leak tight seal and protect the disc from scratches due to metal-to-metal contact. The PTFE encapsulated o-rings and 316 stainless discs offer premium corrosion resistance and the adjustable packing nut with woven PTFE infused packing allows for easy stem adjustments.

Assembly Number	Flange Dims.	Dimensions	Wt.
SV854****	OD: 9.00" [229 mm] BC: 7.50" [191 mm] Holes: 8 - .75" [8 - 19 mm] Thick.: .50" [13 mm]	A: 9.63" [244 mm] B: CLOSE 13.00 " [330 mm] OPEN 24.44" [621 mm] C: 7.00" [178 mm] D: N/A E: N/A	24.5 lb. [11.1 kg]

**** Last four letters of part number designates material of construction as shown below:

Example Assembly

SV854SSTS

(Manual 4" Sliding Valve (Replaceable O-ring Seat) – ANSI Flange x ANSI Flange)


Disc Materials

MSTS = Steel Body with 316 Stainless Stem & Gates

SSTS = 316 Stainless Body, Stem & Gates

Flange bolt pattern per TTMA recommendations and grooved outlets per MIL-C-10387B.

** MAWP certified for new valves only. Seat/disc damage or wear may reduce sealable MAWP.

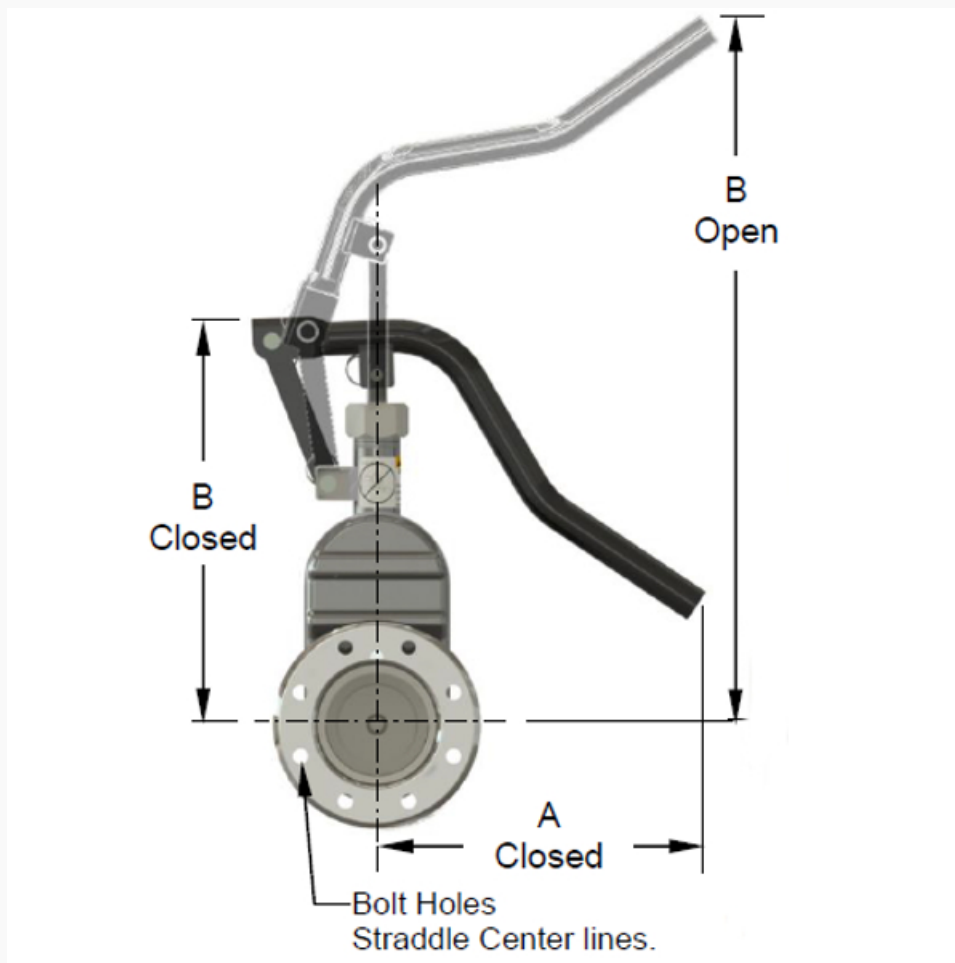



Teflon Accordion Packing

A heat tube option is available for 4" and 6" size by adding suffix "J" to part number.

(Heat tube MAWP = 150 psi)

Body Material	Valve MAWP**	Min. Burst Pressure	Temp. Range
Steel or Stainless	50 psi [3.4 bar]	200 psi [13.8 bar]	-40°F to 400°F [-40°C to 204°C]

NOTE: Valve should NEVER be heated with flame

EB-1-15: Important Notification for Gate/Sliding Valves Used in Hot Service Application

⚠ WARNING: This product can expose you to chemicals including Chromium (hexavalent compounds) which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov. For additional information on Betts products and Proposition 65 list please see: <http://www.bettsind.com/prop-65/>