Manual Manifold Split Manifold

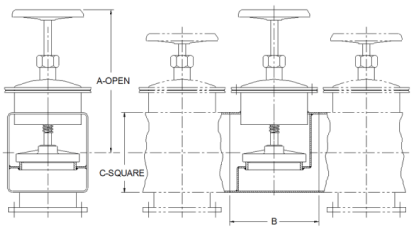

The Betts split manifold valve can be used with any style Betts manifold to isolate sections of the manifold as required. Its use eliminates gasket joints and gate valves. Splitter valves are of welded construction and the design greatly strengthens the manifold.

Size	Material	Non-Pressure Manifold Weight & Assembly No.	Pressure Manifold Weight & Assembly No.
2"	Steel	5.5 SM502MSB	N/A
3"	Steel	10.0 SM503MSB	11.9 PSM503MSB
3"	Aluminum	6.0 SM503ALB	6.8 PSM503ALB
4"	Steel	15.1 SM504MSB	18.0 PSM504MSB
4"	Aluminum	8.5 SM504ALB	9.2 PSM504ALB

⚠ WARNING

Manifold style valves shall not be used where compliance with NFPA385 2-7 is required.

The Betts split manifold valve can be used with any style Betts manifold to isolate sections of the manifold as required. Its use eliminiates gasket joints and gate valves. Splitter valves are of welded construction and the design greatly strengthens the manifold.

NOTES:

1. Split manifold valves are standard with buna-N discs, cork/buna-N gasket and non asbestos packing.

2. See Section 5, page 4A of Parts List

3. See Section 5, page 3B of Parts List.

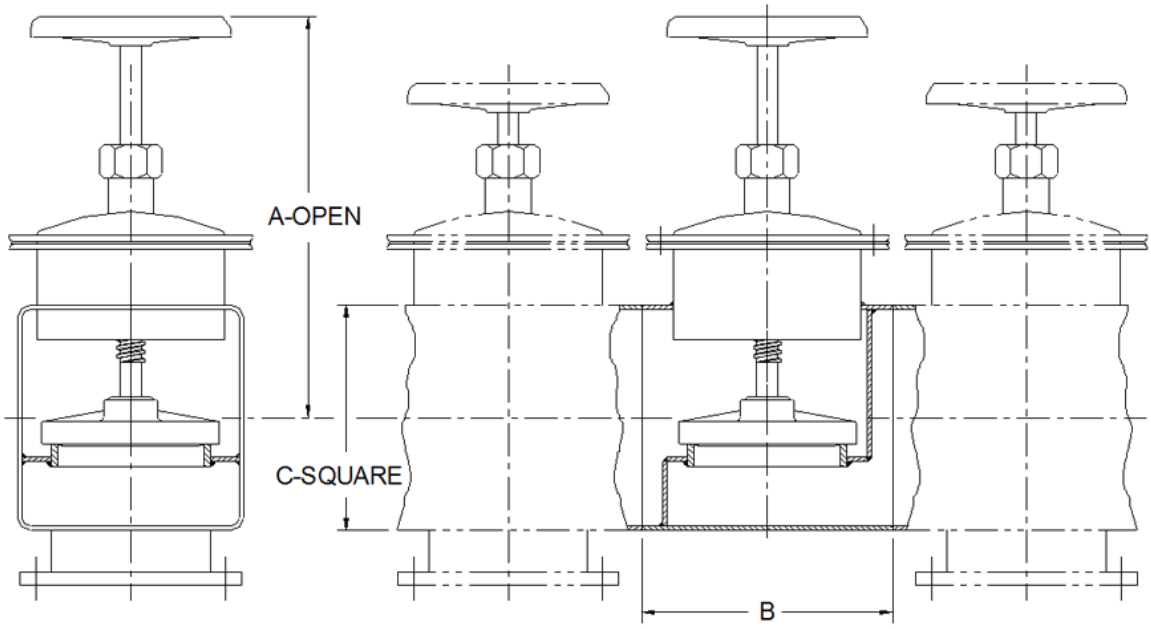

Dimensions

Size	Material	A	B	C
2"	Steel	9	5 1/8	4 3/8
3"	Steel	11 5/16	6 1/4	5 3/4
3"	Aluminum	11 5/16	6 1/4	5 3/4
4"	Steel	12	7 1/2	6 3/4
4"	Aluminum	12	7 1/2	6 3/4