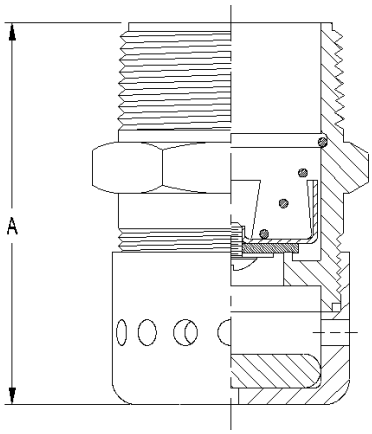

Outbreathing Pressure Vent (1.25" IPS Threads)

The all new Single- Purpose Vents offer many advantages for use where ease of cleaning is important or where additional venting is required. May be installed singly or in multiples. This vent has been flow tested and marked in accordance with Nat. Fire Protection Assn. No. 385 (1964) Par. 2263 and No. 407 (1964) Par. 616.

	Thru Area	Capacity at 3 PSIG
Outbreathing	0.44 sq. in.	3285 cu. ft. hr.
Overturn Protection	Flat Disc	

Assembly No.	Body Material	Overturn Disc & Spring	Disc	Thread Size-Right Hand	A	Wt.
3008-ALV	Aluminum	Stnls. 316	Viton	1 1/4 I.P.S.	2 13/16	4.5 oz.
3008-SSV	Stnls. 316	Stnls. 316	Viton	1 1/4 I.P.S.	2 13/16	11.6 oz.

⚠ **WARNING**: This product can expose you to chemicals including Chromium (hexavalent compounds) which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov. For additional information on Betts products and Proposition 65 list please see: http://www.bettsind.com/prop-65/