Parts List

3.5” (89mm) Flange Mount Interlock Coaming Valve (ADR/EN)

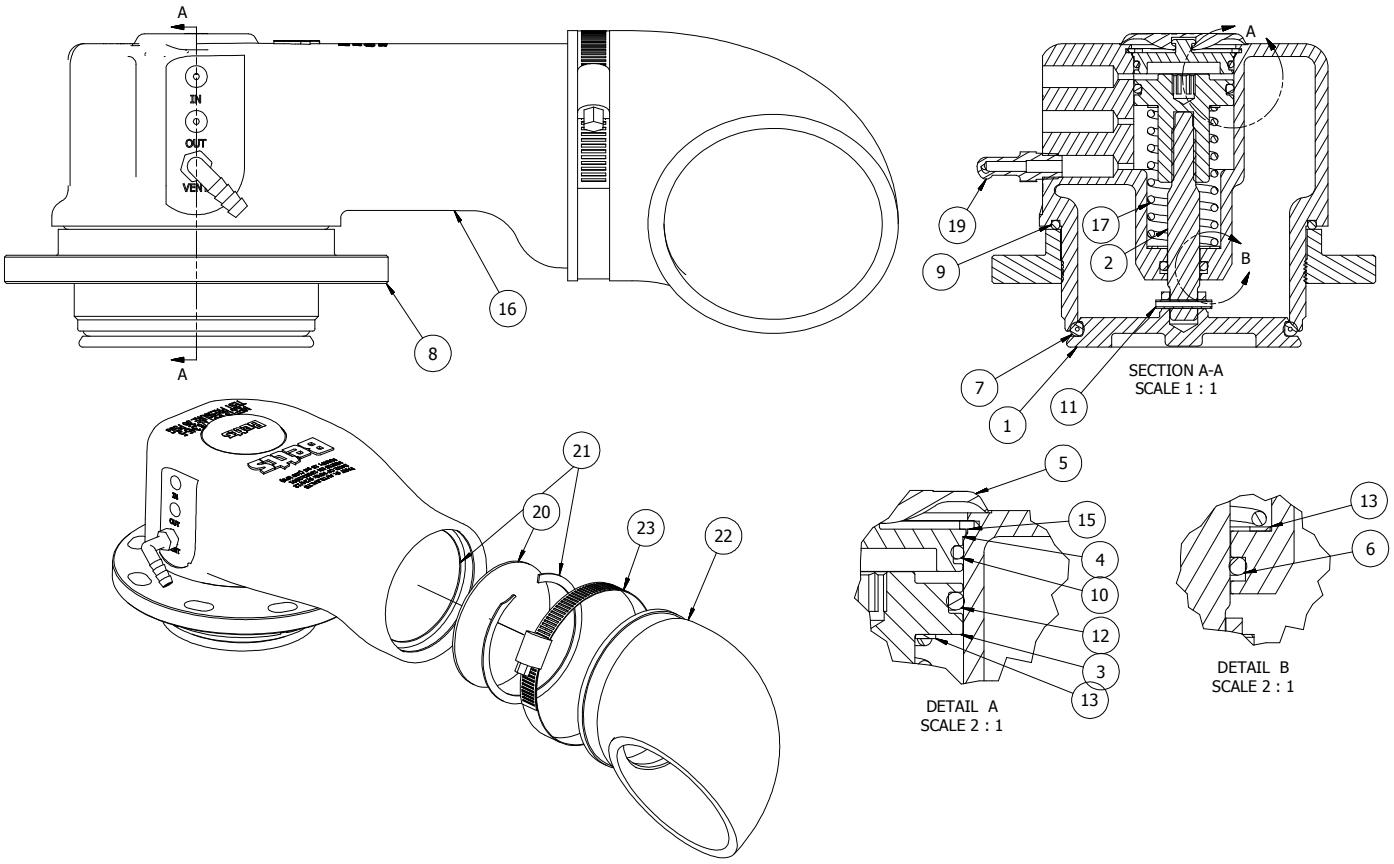

NO.	REQ.	DESRIPTION	MATERIAL	PART NO.
1	1	O-ring Holder	Aluminum	28577AL
2	1	Stem	Stainless	75682SL
3	1	Piston	Aluminum	75636AL
4	1	Air Cylinder Cap	Aluminum	75635AL
5	1	Rain Cap	EPDM	75010EP
6	1	Stem O-ring	Fluorosilicone	19509FS
			Optional mat’l available.	
7	1	Main Seat O-ring	FEP Teflon®	19930TS
			FKM-A	17890VT
			FKM-B	17890VB
8	1	Mounting Flange	Aluminum	28582AL
9	1	Mounting O-ring	FKM-A	17657VT
			Optional mat’l available.	

NO.	REQ.	DESRIPTION	MATERIAL	PART NO.
10	1	Cap O-ring	Fluorosilicone	4339FS
11	1	Roll Pin	Stainless	9Q5920
12	1	Piston O-ring	Fluorosilicone	19971FS
13	2	Red Fiber Washer	Hard Fiber	9Z6184
15	1	Retaining Ring	Stainless	9Q4980
16	1	Body	Aluminum	47239AL
17	1	Spring	Stainless	75634SL
19	1	1/8” NPT Barb Elbow	Nylon	9Z6203
20	1	Screen (30x30)	Stainless	18510SL
21	2	Snap Ring	Stainless	9Q4997
22	1	Hood	Urethane	8N2801
23	1	Hood Clamp	Stainless	17191SL

PLUMBING INFORMATION: Vapor valves may be plumbed separately, in sequence with other vapor valves, or they may be interlocked with air operated emergency valves so the vapor valve must open before the emergency valve opens. Refer to Engineering Bulletin 1-01 for more detailed instructions on suggested plumbing.

WARNING: Use only genuine BETTS INDUSTRIES INC. replacement parts. Use of substitute parts can impair the proper function of this product and void all warranties.